BT-HURRICANE

DESCRIPTION

DMX-controlled studio & stage fan, also perfect for use in clubs, theatres, rental applications....

FEATURES

- DMX-controlled studio & stage fan, also perfect for use in clubs, theatres, rental applications...
- Used for nice fog effects and perfect dispersion of smoke from smoke/hazer machines.
- Very powerful: up to 3500m³/hr or 58m³/min (2060 cfm)
- Seamless airflow (fan speed) control
- Multiple control options:
 - DMX-control 1channel
 - Wireless DMX (see below)
 - Very easy manual operation
- Easy in/output linking on stage:
 - DMX XLR 3+5pin
 - Original Neutrik PowerCON
- Adjustable blowing direction: manual orientation over 180°
- LED-display for easy setup and manual control
- Prepared for wireless DMX: just plug-in an optional WTR-DMX DONGLE! (Briteq[®] code: 4645)
- Ready for truss rigging: prepared for use with optional omega brackets (order code: 2677)
- Perfect for studio use: almost inaudible at low speeds
- Very sturdy metal housing, designed for rough rental applications
- Several handles for easy transport









www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2021 by BEGLEC NV. All rights reserved.

TECHNICAL SPECIFICATIONS

General: Series No

General : Dimensions (cm) 54,8 x 49,6 x 39,7 cm

General : Weight (kg) 16.5

General : Powerinput AC 240V, 50Hz

General : Energy LabelNoGeneral : Power consumption W200General : ColorblackGeneral : DisplayLED

General : Fixation optional omega bracket

General: IP rating indoor

Control : Modes standalone fixed, standalone automatic, manual, DMX

Control: manual
Control: Standalone
Control: maximum DMX channels
Fx: liquid type
Fx: output cu.ft. / min.

Yes
automatic
None
2060

3 pin XLR, 5 pin XLR, wireless
Connections: input

DMX optional, usb, PowerCon® or


compatible

Connections : output3 pin XLR, 5 pin XLR, PowerCon®

or compatible BRITEQ

EANCode 5420025648509

Brand

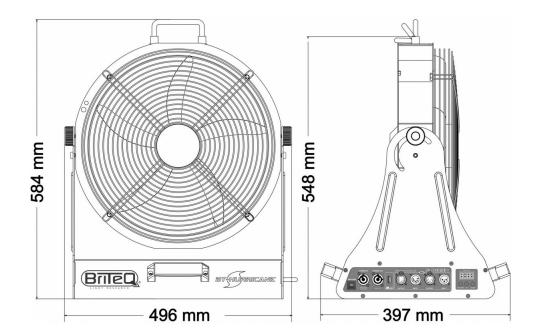



YOUR DEALER



www.briteq-lighting.com | https://www.facebook.com/Briteq