

# BTX-LIGHTSTRIKE

## DESCRIPTION

An extremely powerful and versatile hybrid LED Pixel mapping bar with 112 super bright CW LEDs (16 zones) and 672 RGB LEDs (32 zones). Art-Net / sACN control: excellent for TV-studios, concert stages, ...


## FEATURES

- BTX-LIGHTSTRIKE is a very versatile hybrid LED Pixel mapping bar, excellent for many rental jobs, TV-studios, concert stages, discotheques and many more.
- This hybrid LED bar consists of 2 complementary effects for maximum impact:
  - **112 extremely bright cold-white LEDs**, divided into 16 zones, form a central line to create awesome and overwhelming strobe effects.
  - **672 RGB LEDs** on both sides of the central white strobe line, arranged in 32 powerful LED pixel zones of 21 RGB LEDs each, provide a powerful tool for creating stunning, colorful moving images.
- Multiple operating modes allow for flexible use in any setting imaginable:
  - **Extended DMX modes** with up to 113 channels where you can control each pixel individually via media servers to create the most insane images and hallucinating effects.
  - **Limited-channel DMX modes** (only 15CH) where the built-in effect macros ensure that incredibly creative shows can be built with relatively simple DMX controllers in very little time.
- Besides the standard DMX with RDM support, there is also **full support for Art-net and sACN** allowing large sets to be built up and controlled quickly and efficiently.
- The BTX-LIGHTSTRIKE is very compact and has a low weight which allows it to be quickly incorporated into all kinds of scenery.
- For easy installation, 2 mounting options are included:
  - **2 Tilt mounting brackets:** to which standard clamps can be added.
  - **2 Omega bracket bases:** for use with included omega brackets.
- Equipped with an **inventive quick-release mechanism** that allows you to quickly connect and align multiple projectors.
- Standard equipped with 3pin XLR, RJ45 network and PowerCON compatible connector in/outputs for easy daisy chaining.
- Very silent operation, thanks to temperature-controlled cooling fans.
- Alphanumeric OLED-display and touch keys to select the different options in the setup menu.
- Four dimmer curves: linear, square, inverse square, S-curve.



## TECHNICAL SPECIFICATIONS

<b>General : Dimensions (cm)</b>	100 x 8.4 x 11.1
<b>General : Weight (kg)</b>	5.5
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	350
<b>General : Color</b>	black
<b>General : Display</b>	OLED
<b>General : Fixation</b>	included omega bracket
<b>General : IP rating</b>	indoor
<b>Control : Modes</b>	DMX
<b>Control : Protocol</b>	Art-Net, sACN, DMX, RDM
<b>Control : programmable</b>	No
<b>Control : upgradable software</b>	Yes
<b>Control : minimum DMX channels</b>	6
<b>Control : maximum DMX channels</b>	113
<b>Light : lamp socket</b>	No
<b>Light : lamp</b>	LED
<b>Light : colors</b>	RGBW
<b>Light : mix colors</b>	Yes
<b>Light : min. beam angle (°)</b>	116
<b>Light : max. beam angle (°)</b>	116
<b>Light : max. refresh rate (kHz)</b>	12
<b>Connections : input</b>	3 pin XLR, artnet, RJ45, rdm, PowerCon® or compatible
<b>Connections : output</b>	3 pin XLR, artnet, RJ45, rdm, PowerCon® or compatible
<b>Brand</b>	BRITEQ
<b>EANCode</b>	5420025647182
<b>SKU</b>	B04718

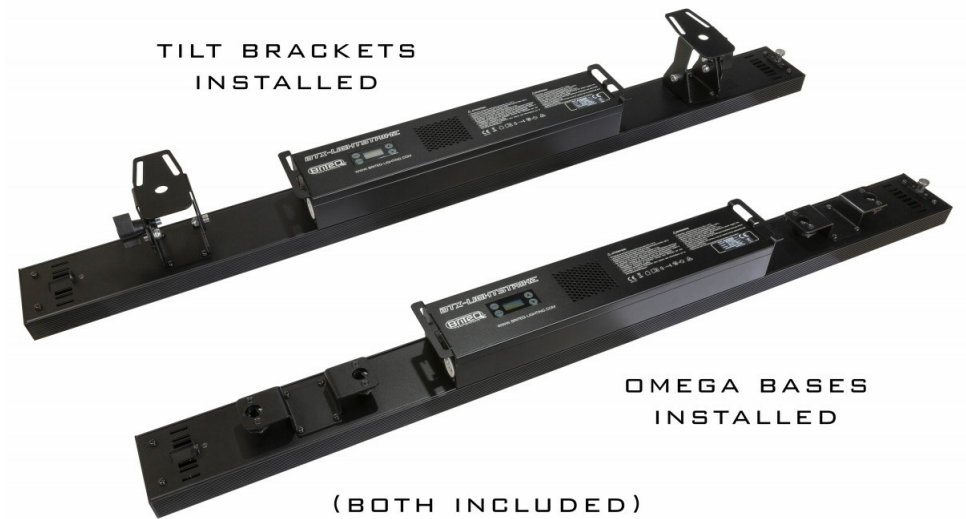

### QUICK-RELEASE MECHANISM



### YOUR DEALER

