# BT-AKKUPOLE

#### DESCRIPTION

Stylish battery-powered 4x 5Watt LED-lighting pole with wireless DMX, perfect to light up buffets, presentation counters, etc.

#### **FEATURES**

- Stylishly designed battery-powered lighting pole with great autonomy.
- The perfect tool for illuminating buffets, presentation counters, etc.
- Equipped with 4 pivoting 5 watt 25° LED projectors (3000K & CRI>90)
- The sturdy swivel arm with projectors can be set in 6 fixed positions.
- Lightning fast assembly/disassembly without any tools.
- Sturdy construction quality with adjustable height for frequent and versatile use in rental jobs.
- Different heights possible: just install 1, 2 or no 1m extension tube
- Also 50cm extension poles are available as an option.
- The supplied heavy base (45x37cm) ensures very high stability, even at maximum height.
- Equipped with magnetic filter holders for the use of optional filters:
  - CTO/CTB filters: adjust CCT to e.g. 4000K, 2700K, ...
  - Color filters: choose any color imaginable
  - Frost filters: adjust beam angle
- Clear and very easy user interface.
- 3 touch buttons and clear LCD screen with information about remaining battery time.
- Multiple operating modes:
  - Built-in wireless DMX receiver (with XLR output: can serve as W-DMX receiver)
  - Wired DMX control via XLR in/out (1 dimming channel)
  - Simple manual operation on the base.
- High capacity lithium batteries (288Wh) for extended autonomy (>14.5 hours at 100% output).
- Internal processor-controlled battery charger with IP65 PowerKon in/output.
- Works perfectly on mains power as well (batteries are recharged during use)
- Professional flight case (120x60cm) optionally available for transport of 4 complete sets.







www.briteq-lighting.com | https://www.facebook.com/Briteq

### TECHNICAL SPECIFICATIONS

**General : Dimensions (cm)** see picture

**General: Weight (kg)** 25

**General : Powerinput** AC 100 - 240V, 50/60Hz, Battery

General: Works on battery yes
General: Energy Label No
General: Power consumption W 69
General: Color black
General: Display LCD
General: IP rating indoor

Control: Modes standalone fixed, manual, DMX,

Control: Protocol Master/Slave DMX, Wireless DMX

**Control: programmable** No **Control: upgradable software** No **Control: minimum DMX channels** 1 **Control: maximum DMX channels** 1 **Light: lamp socket** No **Light: lamp LED Light: min. color temperature (K)** 3200 **Light:** max. color temperature (K) 3200 Light: CRI 90

**Light : colors** Warm white

Light : mix colorsNoLight : min. beam angle (°)25Light : max. beam angle (°)50Light : max. refresh rate (kHz)4.3

**Connections: output** 

**Connections : input**3 pin XLR, wireless DMX,

PowerCon® TRUE1 or compatible

3 pin XLR, wireless DMX,


PowerCon® TRUE1 or compatible

Brand

BRITEQ

**EANCode** 5420025651622



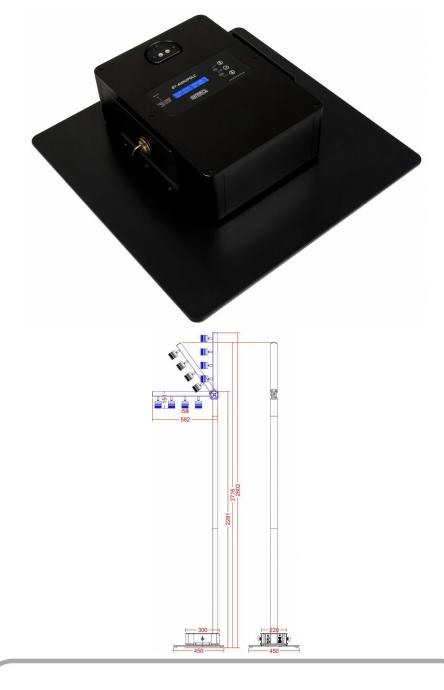



## www.briteq-lighting.com | https://www.facebook.com/Briteq